



CRANE TYPE: SQ12SA4T

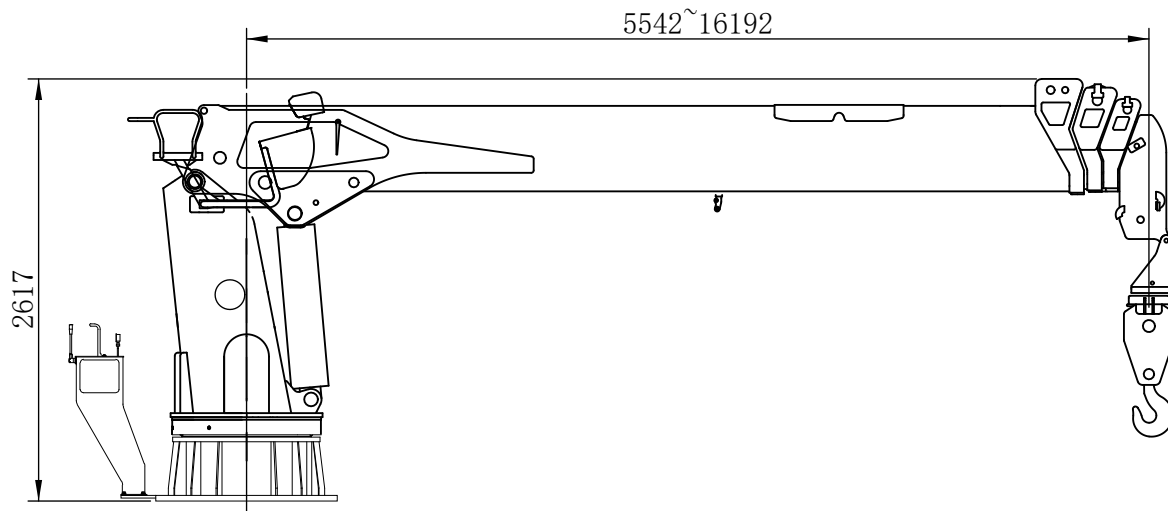

起重机底板安装尺寸

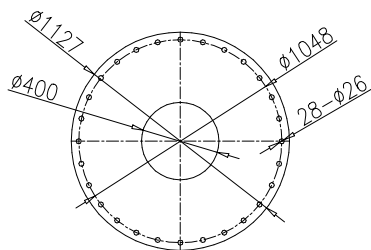

Technical parameter

最大起重质量	Max Lifting Capacity	12000Kg
最大起重力矩	Max Lifting Moment	33ton.m
推荐功率	Recommend Power	45KW
液压系统流量	Hydraulic System Flow	75L/min
液压系统压力	Hydraulic System Pressure	26Mpa
液压油箱容积	Oil Tank Capacity	200L
回转角度	Rotation Angle	360°
起重机自重	Self Weight	4050Kg

Boom Angle	Boom length (m)			
	5.85	9.32	12.82	16.5
	Working Radius(m)/Lifting Capacity (kg)			
0°	5.5/5800	9/2740	12.6/1850	16.2/1200
10°	5.4/5900	8.8/2800	12.4/1850	16/1200
20°	5.2/6300	8.5/2900	11.8/1900	15.2/1300
30°	4.7/6600	7.7/3250	11/1900	14/1400
40°	4.2/7900	6.8/3650	9.6/2200	12.3/1620
50°	3.4/9200	5.7/4300	8/2600	10.3/2100
60°	2.5/12000	4.4/5400	6.2/3600	8/2500
70°	—	2.8/7000	4.1/5300	5.3/3300
75°	—	2.4/7000	3.3/5500	4.2/3840

Specifications subject to change without notice.

Address: Tongshan Economic Develop Zone, Xuzhou City, Jiangsu Province, China.

Tel:86-13815318392

E-Mail: Sales@boblift.com